

## DATASHEET

# FiberVisions® HY-Light-S PP fibers for Spunlacing

## Part of FiberVisions Trilobal Fiber Platform

FiberVisions has developed cost effective trilobal PP staple fibers as a means to make fabrics more versatile without sacrificing nonwoven properties.




FiberVisions trilobal PP staple fibers allow customers to make nonwoven fabrics with dramatically improved coverage and uniformity. Additionally, these trilobal fibers have been produced at finer titers to improve nonwoven softness and strength and further improve coverage and uniformity versus round staple fibers.

Furthermore, these trilobal fibers are optimized for dry laid nonwoven formation systems and are specifically designed to be converted into spunlace fabrics.



### Higher Opacity

The significance of the trilobal fibers is evident when comparing the opacity of CTB fabrics (12-23 g/m<sup>2</sup>) produced from these fibers.

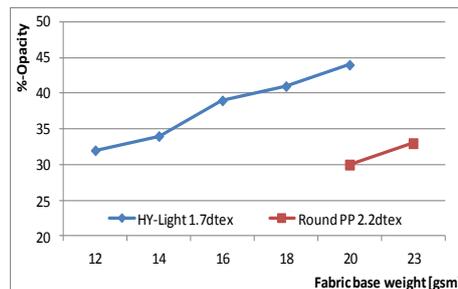

The increased surface area of the fibers results in higher light scattering and therefore, higher opacity.

### What can FiberVisions PP trilobal fibers add to your product?

FiberVisions trilobal fibers are made from polypropylene using a new technology and have a number of remarkable characteristics:

- ◇ Developed for dry laid fiber formation systems
- ◇ Improved coverage even in lightweight fabrics
- ◇ Engineered to provide high fiber tensile strength
- ◇ Basic PP fiber qualities:
  - low density (0.91 g/cm<sup>3</sup>)
  - resistance to alkalis, acids, and most organic chemicals
  - very low moisture absorption

Fiber titer, cut length, crimp and lubrication are tailored to the needs of the application and of the customer to assure excellent process quality.

### FiberVisions® HY-Light-S

- Commercially available in:

- ◇ 1.0 - 3.3 dtex
- ◇ Hydrophillic
- ◇ Designed for Spunlacing



### Performance profile of polypropylene fibers

FiberVisions fibers have a number of advantages over other man-made fiber types:

**Density.** The density of polypropylene is 50% lower than polyester and 60% lower than viscose fibers. This means that lightweight fabrics can be made with excellent bulk and cover from lower denier yarns than from other fiber types.

**Comfortable.** Polypropylene is a very comfortable and soft fiber. It enable nonwovens with high extensibility, good drapeability and it has excellent resistance to static build-up.

**Insulation.** Polypropylene has the lowest conductivity of all textile fibers, and it absorbs no moisture.

**Resistance.** Polypropylene is inert to acids, alkalis and other chemicals. It is resistant to rot, mildew and bacteria. Polypropylene fiber is highly resistant to abrasion and has a toughness superior to most fibers.

**Technical Service.** FiberVisions believes in offering extensive technical service to its customers. This includes fiber innovation programs, exclusive fiber development, color matching, and fiber quality enhancements.

**Request a trial for your next application!**

DATASHEET

**FiberVisions® HY-Light-S** for Spunlacing  
Typical Fiber Properties

		FiberVisions® HY-Light-S		
 Titer	dtex	1.0	1.3	3.3
 Tenacity	cN/dtex	4.0-4.4	3.6-4.0	4.2-4.6
 Elongation	%	60-100	100-140	80-120
 Fiber length	mm	40-60	40-60	40-60
 Melting point	°C	162°C	162°C	162°C
 Softening point		140-150°C	140-150°C	140-150°C
 Crimp frequency	n/100mm	Adjustable (65-85)		
 Spin finish level	%	Adjustable (0.25-0.65%)		

All measurements are conducted under standard atmosphere according to ISO 554 (23°C/50%) with use of FiberVisions Internal test methods.

*Polyolefin fibers consist of 99% carbon and hydrogen and if added, TiO<sub>2</sub>. The remaining 1% consists of water and applied spin finish. The fiber bales are protected with polyolefin foil and closed with polyester straps. The product and the packaging materials are suitable for recycling and combustion. In-house waste should be kept clean to facilitate direct recycling. In disposal of any waste, ensure that all applicable regulations are met.*

FiberVisions  
3700 Crestwood Parkway, suite 900  
Duluth, Georgia 30096  
Tel.: +1 678 578 7240  
Fax: +1 678 578 7276  
Email: [fibervisions@fibervisions.com](mailto:fibervisions@fibervisions.com)

FiberVisions a/s  
Engdraget 22  
6800 Varde, Denmark  
Tel.: +45 7994 2200  
Fax: +45 7994 2201  
Email: [fibervisions@fibervisions.dk](mailto:fibervisions@fibervisions.dk)

FiberVisions Textile Products, Ltd.  
No. 29 Heng Shan Road  
Suzhou, China 215009  
Tel.: +86 512 6823 1099  
Fax: +86 512 6823 0021  
Email: [sales.suzhou@fibervisions.com](mailto:sales.suzhou@fibervisions.com)

[www.fibervisions.com](http://www.fibervisions.com)

Disclaimer: FiberVisions believe that all statements, technical information and recommendations herein regarding its products and the possible uses of its products are accurate and reliable. However, they are presented without guarantee or warranty of any kind, either express or implied. Users of our products should make their own tests to determine the suitability of each such product for their particular purposes. FiberVisions does not recommend any use of its products that would violate any patent or other rights. Further information can be provided by your FiberVisions sales representative.